

Framed Doors - High Pressure

CONTACT

Office: 888.973.7600


1100 Ashwood Drive
Suite 1102
Canonsburg, PA 15317

www.clward.com

Detail

- High density fiberglass 1" insulation with UL classification: FHC25/50
- Consist of two, 24 gauge galvanized steel panels, mechanically locked together
- Tested to 10" static pressure with minimal leakage
- High density, closed cell gasket, which has a service range of – 20° to 100°, is bonded to both the inside and outside of the dovetail frame.
- Dovetail Frames 6x6 to 12x12 are manufactured from 24 gauge Galvanized steel. Dovetail frames 14x14 to 24x24 are manufactured from 22 gauge galvanized steel.
- All frames are manufactured with spotwelds at each corner for increased strength
- Cams are manufactured from 16 gauge galvanized steel and secured to the door with a rivet
- Latches are manufactured from 20 gauge galvanized steel and secured to the frame with two spot welds
- Available is galvanized, galvanized, stainless 304, stainless 316 and aluminized

Profile

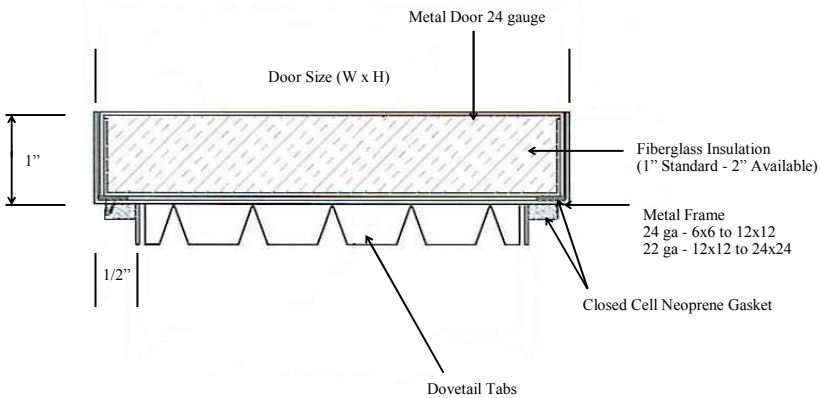

Packaging

Door Size	Item Code	Number of Cams	# per Carton	Lbs per Carton
6" x 6"	FDHPC6GA	4	20	31
8" x 8"	FDHPC8GA	8	20	45
10" x 10"	FDHPC10GA	8	10	30
12" x 12"	FDHPC12GA	8	10	39
14" x 14"	FDHPC14GA	8	10	50
16" x 16"	FDHPC16GA	8	5	30
18" x 18"	FDHPC18GA	8	5	38
20" x 20"	FDHPC20GA	8	5	45
24" x 24"	FDHPC24GA	8	5	60

