

www.insulateyourhome.com

CRACK DOWN ON ENERGY LOSS

WITH GREAT STUFF PRO™ GAPS & CRACKS
INSULATING FOAM SEALANT

Considering the combined open space created by gaps, cracks and penetrations in the average home can total as much as a 4' x 4' window left wide open,* it's no wonder that air infiltration is one of the biggest

threats to a home's energy efficiency. And as uncontrolled air movement drives up energy bills, it may also increase the potential for mold, mildew and other moisture-related problems.

CLOSE THE GAP

Fill the gaps ... and crack down on energy loss with GREAT STUFF PRO™ Gaps & Cracks Insulating Foam Sealant.

GREAT STUFF PRO™ Gaps & Cracks is a polyurethane foam gap/crack filler for use all around the home. It is also recognized as a fireblock penetration sealant (US only).

GREAT ON BENEFITS

For a professional seal, rely on GREAT STUFF PRO $^{\rm TM}$ Gaps & Cracks.

- Ideal for gaps and penetrations up to 3" (75 mm)
- Expands to form airtight and waterresistant seal
- Bonds to wood, metal, masonry, glass and most plastics
- Repels and deflects water
- Quick cure time (tack-free in less than 20 minutes, trim within 30 minutes)**
- Cost-effective: 24 oz (680 g) can equivalent up to 22 quart tubes of caulk; 30 oz (850 g) can up to 33 quart tubes of caulk†
- Easy cleanup with GREAT STUFF PRO™ Gun Cleaner

INSULATING FOAM SEALANT
GAPS & CRACKS

 $[\]ensuremath{\mathfrak{B}}^{\text{TM}}$ Trademark of The Dow Chemical Company ("Dow") or an affiliated company of Dow *Source: www.eere.gov

^{**}Actual cure time will depend on temperature, relative humidity and size of foam bead. †Based on estimated yield under ideal conditions using gun foam, 3/8" bead.


THE PROFESSIONAL CHOICE

GREAT STUFF PRO™ Gaps & Cracks Insulating Foam Sealant helps prevent drafts, repel water and more, which can result in improved home comfort and greater customer satisfaction.

- The first foam sealant to be recognized as a fireblock (US only)
- · Resists water intrusion
- Maximizes energy efficiency

A TYPICAL 2,500 FT2 HOME HAS OVER 1/2 MILE OF CRACKS AND CREVICES.


- Air Barrier Association of America

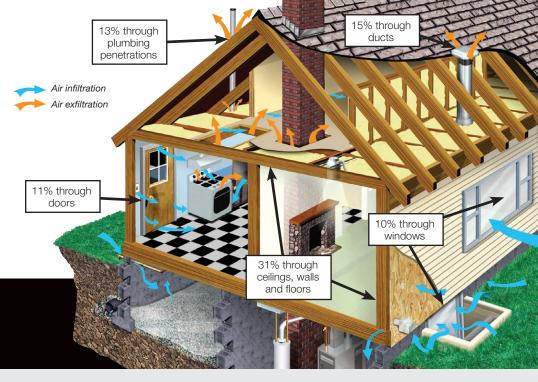



Use GREAT STUFF PRO™ Gaps & Cracks Insulating Foam Sealant to seal and insulate around common areas of energy loss such as foundation/sill plate, outdoor fixtures, pipe penetrations, attic and more.§







Electrical wire penetrations

[§]When used outdoors, cured foam will discolor when exposed to natural light. Paint or coat foam for best results.

CONTACT DOW FOR MORE INFORMATION ON HOW TO CRACK DOWN ON ENERGY LOSS

Call your Dow representative for more details.

1-866-583-BLUE (2583) • www.insulateyourhome.com

NOTICE: No freedom from any patent owned by Dow or others is to be inferred. Because use conditions and applicable laws may differ from one location to another and may change with time, Customer is responsible for determining whether products and the information in this document are appropriate for Customer's use and for ensuring that Customer's workplace and disposal practices are in compliance with applicable laws and other government enactments. The product shown in this literature may not be available for sale and/or available in all geographies where Dow is represented. The claims made may not have been approved for use in all countries or regions. Dow assumes no obligation or liability for the information in this document. References to "Dow" or the "Company" mean The Dow Chemical Company and its consolidated subsidiaries unless otherwise expressly noted. NO WARRANTIES ARE GIVEN; ALL IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ARE EXPRESSLY EXCLUDED.

COMBUSTIBLE: Protect from high heat sources. For more information, consult MSDS, call Dow at 1-866-583-BLUE (2583) or contact your local building inspector. In an emergency, call 1-989-636-4400.

GREAT STUFF PROTM Gaps & Cracks sealant and adhesive products contain isocyanate and a flammable blowing agent. Read the label and Material Safety Data Sheet carefully before use. Eliminate all sources of ignition before use. Wear gloves, and safety glasses or goggles. Provide adequate ventilation or wear proper respiratory protection. Contents under pressure.

Building and/or construction practices unrelated to building materials could greatly affect moisture and the potential for mold formation. No material supplier including Dow can give assurance that mold will not develop in any specific system.

FOR TECHNICAL INFORMATION: 1-866-583-BLUE (2583) FOR SALES INFORMATION: 1-800-232-2436 THE DOW CHEMICAL COMPANY

Dow Building Solutions • 200 Larkin • Midland, MI 48674

FOR TECHNICAL INFORMATION: 1-866-583-BLUE (2583) (English) • 1-800-363-6210 (French) FOR SALES INFORMATION: 1-800-232-2436 (English) • 1-800-565-1255 (French) DOW CHEMICAL CANADA ULC

Dow Building Solutions • Suite 2100 • 450 - 1st St. SW • Calgary, AB T2P 5H1



Printed in U.S.A.

Form No. 179-07703-0410MCK 178-00470-0410MCK

