


# 3" Long Spin-In Collar

## Specifications

- Galvanized Steel (ASTM A653 and A924)
- G-60 Galvanized Coating (ASTM A653 and ASTM 90)
- Available in Specialty Metals:
  - Aluminum (ASTM B209 Alloy 3003 Temper H14)
  - 304 Stainless Steel (ASTM A480 2B Finish)
- Pressure Rating: Designed per SMACNA Third Edition 2005 Section 4.8 Figure 4-6 Brand Connections
- Dimensional Tolerance:  $\pm 1/4"$

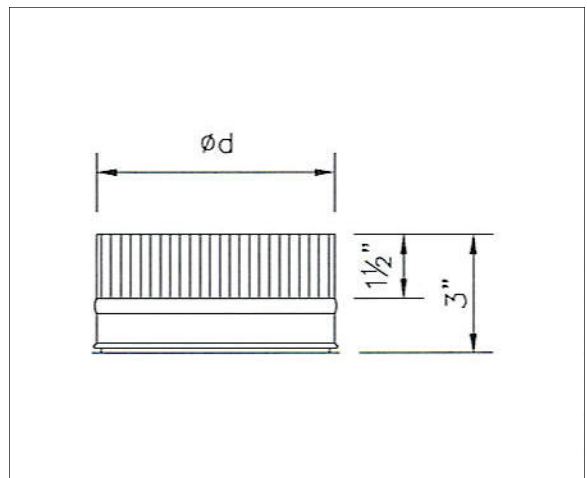

Product Availability				
Size $\varnothing$ d	Gauge Availability		Quantity	
	26 Ga.	24 Ga.	Carton	Skid
4"	YES	-	30	840
5"	YES	YES	30	840
6"	YES	YES	25	700
7"	YES	YES	25	700
8"	YES	YES	25	700
9"	YES	YES	20	560
10"	YES	YES	20	560
12"	YES	YES	20	280
14"	YES	YES	10	160
16"	-	YES	10	160
18"	-	YES	10	100
20"	-	YES	10	100
22"	-	**	**	**
24"	-	**	**	**

\*\* Consult factory for availability