


TRASPIR ADHESIVE 260

HIGHLY BREATHABLE SELF-ADHESIVE MEMBRANE

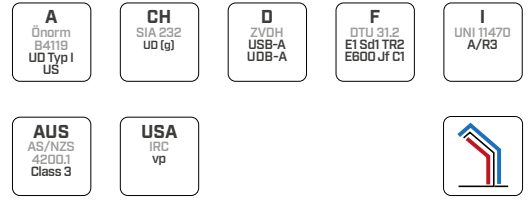

SELF-ADHESIVE


Thanks to the new generation glue, the membrane ensures good adhesion even on rough OSB.

SECURE SEALING

The adhesive surface prevents the formation of airflow behind the membrane in case of accidental breakage or failure to seal.

BREATHABLE

Thanks to the patented glue, the membrane remains perfectly breathable even when fully bonded.

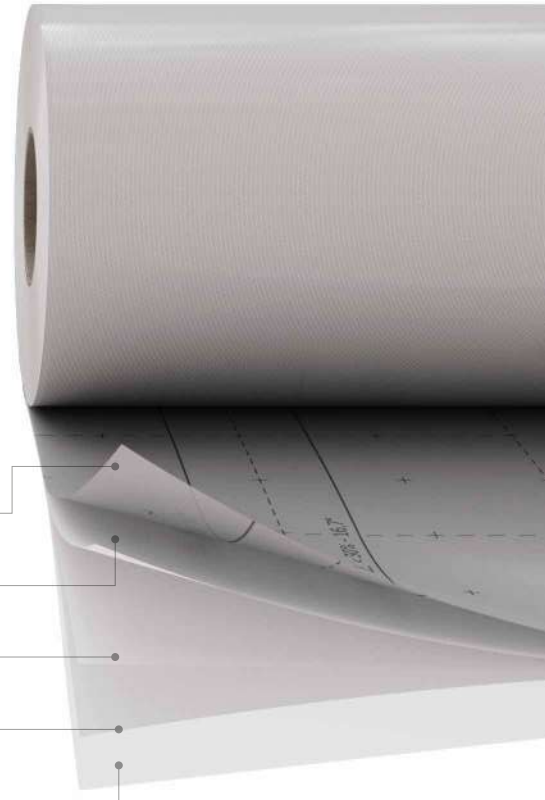

COMPOSITION

top layer
non-woven PP fabric


middle layer
PP breathable film

bottom layer
non-woven PP fabric

glue
acrylate dispersion without solvents

release liner
removable plastic film

CODES AND DIMENSIONS

CODE	description	liner	H	L	A	H	L	A	
		[mm]	[m]	[m]	[m ²]	[ft]	[ft]	[ft ²]	
TA260	TRASPIR ADHESIVE 260	725 / 725	1,45	50	72,5	5	164	780	16
TAS260	TRASPIR ADHESIVE 260 STRIPE	180 / 180	0,36	50	18	1.18	164	194	-



FAST INSTALLATION

The fully self-adhesive surface of the membrane allows fast and safe installation without compromising performance.

CONSTRUCTION SITE

During construction, it is essential to protect the structure, especially if it remains visible once the building is completed: TRASPIR ADHESIVE 260 offers excellent protection.

TECHNICAL DATA

Properties	standard	value	USC conversion
Mass per unit area	EN 1849-2	260 g/m ²	0.85 oz/ft ²
Thickness	EN 1849-2	approx. 0,6 mm	approx. 24 mil
Water vapour transmission (Sd)	EN 1931	0,22 m	-
Water vapour transmission (dry cup)	ASTM E96/ E96M	-	16.5 US perm
Maximum tensile force MD/CD	EN 12311-1	315 / 250 N/50mm	36 / 29 lb/in
Elongation MD/CD	EN 12311-1	61 / 66 %	-
Resistance to nail tearing MD/CD	EN 12310-1	255 / 260 N	57 / 58 lbf
Watertightness	EN 1928	class W1	-
Temperature resistance	-	-30 / 80 °C	-22 / 176 °F
Resistance to penetration of air	EN 12114	0 m ³ /(m ² h50Pa)	0 cfm/ft ² at 50Pa
Thermal conductivity (λ)	-	0,3 W/(m·K)	0.17 BTU/h·ft·°F
Specific heat	-	1800 J/(kg·K)	-
Density	-	433 kg/m ³	approx. 0.25 oz/in ³
Water vapour resistance factor (μ)	-	approx. 366	approx. 1.1 MNs/g
UV stability ⁽¹⁾	EN 13859-1/2	3 months	-
Exposure to weather ⁽¹⁾	-	4 weeks	-
After ageing:			
- watertightness	EN 1297 / EN 1928	class W1	-
- maximum tensile force MD/CD	EN 1297 / EN 12311-1	295 / 225 N/50mm	34 / 26 lb/in
- elongation	EN 1297 / EN 12311-1	45 / 47 %	-
Adhesion strength on steel at 180°	EN 12316-2	12,5 N/cm	7.1 lb/in
180° adhesion force on proper support	EN 12316-2	8,5 N/cm	5 lb/in
Joint strength	EN 12317-2	132 N/50mm	15 lb/in
Solvents	-	no	-
Storage temperature	-	5 / 25 °C	41/77 °F
Application temperature	-	-5 / 35 °C	23 / 95 °F

⁽¹⁾ For the correlation between laboratory tests and actual conditions, see page 199.

Available in different configurations on request. It is possible to customise the mass per unit area of the membrane, the amount of acrylic glue, the size and the pre-cut of the liner.



SPECIAL GLUE

The acrylic dispersion glue has a specific formulation to ensure breathability and does not alter the functions of the functional film inside the membrane.

RECOMMENDATIONS FOR INSTALLATION

APPLICATION ON CEILING



SEALING FASTENING SYSTEMS



1 SPEEDY BAND 300, FLEXI BAND, PLASTER BAND

2 PROTECT, BYTUM BAND
PRIMER SPRAY, PRIMER

RECOMMENDATIONS FOR INSTALLATION

APPLICATION AT A HOLE



1 MARLIN, CUTTER

APPLICATION ON WALL

