

SPECIFICATIONS

GLT Tempmat is non-corrosive, non-combustible, non-alkaline and chemically stable. Its excellent heat resistance, flexibility and low thermal conductivity make Tempmat an effective low-cost replacement for asbestos mats, millboard refractory paper and other similar products.

The transition from asbestos to glass fibers has resulted in an increasingly wide range of application for Tempmat, rather than organically bonded glass fiber insulating blanket. A 100% "E" fiberglass mat, Tempmat is manufactured in web form and mechanically needled together to form thicknesses of ¼", ½" and 1". There are no binders in Tempmat. Instead, long textile fibers have been accurately chopped to provide maximum density, high insulation and strong physical properties in temperatures up to 1200°F.

GLT Tempmat is being used to solve increasingly complex applications in oil refineries, steam and gas turbines, exhaust systems on diesel tug, tankers, Coast Guard and Navy vessels, and pleasure yachts. It is used to relieve stress at welding points and on valve flange covers. In addition, Tempmat acts as an insulator over automotive thermactor switches, for floor pans over catalytic converters and in luggage compartments. In nuclear power plants, these blankets reduce labor costs during removal for inspection and service, and cut re-insulation costs associated with poor fitting rigid block.



GLT Tempmat meets the following requirements of commercial and government specifications:

MIL-1-24244	Compliance with government specifications
MIL-1-16411, Type II	U.S. Coast Guard incombustible materials, USCG 164-009

Physical Properties of GLT Tempmat

	Thickness (in.)	Mass (density lbs./cu. ft.)	Width (in.)	Roll Length (ft.)	Surface Area (sq. ft./roll)	Approx. Roll Weight (net lbs.)
Style #1006	¼"	9 to 11	60	150	750	188
Style #1050	½"	9 to 11	60	75	375	188
Style #1031	1"	9 to 11	60	45	225	225

Note: Width and roll length can be made to order. All values above are nominal values.


Physical Properties

Service Temperature..... Up to 1200°F
 Fire Resistance Incombustible
 Density (Approximate)..... 9 - 11 lbs./cu. ft.
 Moisture Absorption..... Negligible


Thermal Conductivity ("K" value at 9.1 lbs./cu. ft.):

Mean Temperature	"K"-btu/sq. ft./hr./°F/in.
300°F	0.40
500°F	0.50
700°F	0.65

Thermal Conductivity (btu/sq ft/hr/°F/in)

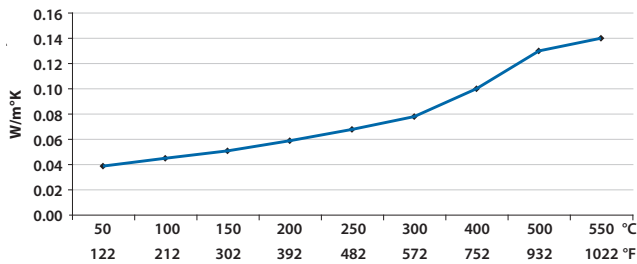

Glass Filament Tensiles (at various temperatures)

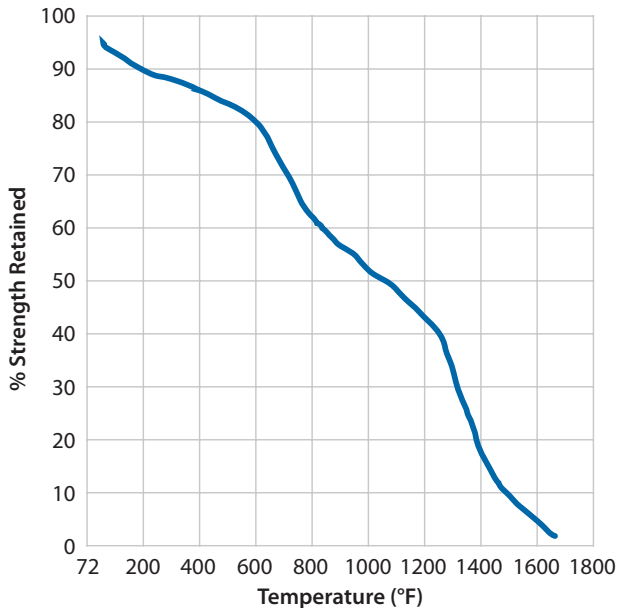

Properties of Fiberglass "E" Glass

Physical/Mechanical Properties of Glass Fibers

Specific Gravity..... 2.60 grams/cc.
 Density 0.094 lbs./cu. in.
 Tensile Strength (PSI×10³ @ 70°F)..... 500 lbs.
 Modulus of Elasticity (PSI×10 @ 72°F)..... 10.5 lbs.
 After Heating (PSI×10 @ 1000°F)..... 11.8 lbs.
 Elongation (@ 72°F)..... 4.8%

Thermal Properties of Bulk Glass

Softening Point..... 1500°F
 Strain Point..... 1100°F
 Annealing Point 1200°F

Electrical Properties of Bulk Glass

Dielectric Constant
 1 MHz @ 72°F..... 6.33
 10kHz @ 72°F..... 6.13
 Power Factor
 1MHz @ 72°F 0.001
 10kHz @ 72°F 0.0039

Note: The physical and performance properties cited in this literature have been derived in tests conducted by various fiber companies.

Tests have been conducted on both fiber and fabrics woven with bulked glass fiber.

Reference to U.S. Government specification values as well as information provided on certain end uses which currently use bulked glass are presented for the information of potential customers in determining the potential suitability of these products for their own applications. No claims are made as to the accuracy or applicability of the test methods employed or the results derived therefrom.

Important Cautionary Note: Items of protective equipment manufactured from fiberglass fabrics such as aprons, gloves, mittens, etc. should be labeled to show the maximum short-term and continuous-exposure temperature limits established in accordance with the standard specifications applicable to the item of equipment being offered.

Subject to price change and availability.

Revised 0515

For more information on GLT Products, please visit us online at www.gltproducts.com or call toll-free at 1-800-874-1748.



HEADQUARTERS:

6810 Cochran Road | Solon OH 44139 | 440.914.1122 | 440.914.1133 Fax | 1.800.874.1748

DISTRIBUTION CENTERS:

Ohio: 6810 Cochran Road | Solon OH 44139 | 440.914.1122
Texas: 8905 Market Street | Houston, TX 77029 | 1.800.874.1748
North Carolina: 501 West Camel Street | Greensboro, NC 27401 | 1.800.551.9760
California: 4113 Gold River Lane | Stockton, CA 95215 | 1.800.833.4500
Ontario, Canada: 55 Milburn Road | Hamilton, ON L8E 3C4 | 1.800.874.1748